

# SF UF UNDERFLOOR INSULATION



MORE INFORMATION

## 3 IN 1 DESIGN

INSULATION, VAPOUR CONTROL LAYER & RADIANT BARRIER

## EASY TO INSTALL

NO SPECIALIST TOOLS REQUIRED AND THE PRODUCT IS FLEXIBLE & VERSATILE

## DESIGNED TO DELIVER

CAN BE USED IN STANDALONE OR HYBRID APPLICATIONS

## IDEAL FOR USE IN

NEW BUILD, RETROFIT, TIMBER-FRAME, DIY, AND EXTENSIONS

Can be  
Screeded  
Over

# SFUF SuperFOIL




CUT TO  
SIZE



SECURE TO  
SURFACE




SEAL WITH  
TAPE

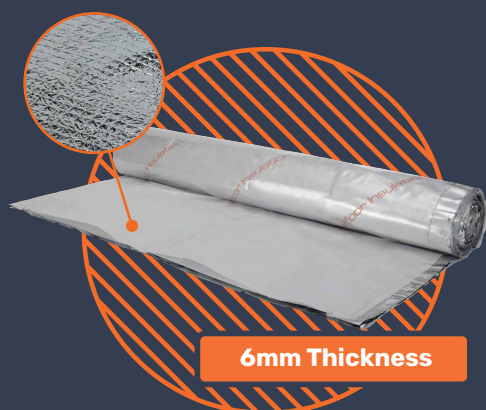

6mm Thickness

Our underfloor insulation is created using the most modern technology and exceptionally high standards to help you insulate your property most efficiently. It can also be screeded directly over thanks solution and can be screeded directly over



## Product Composition

Reinforced Heavy Duty Double Laminated Foil	2
Aluminium Coated Reflective Foil PET Layers	4
Thermo Foam Separation Layers	6
Polyethylene Protective Layer	1
Total Layers	13

## Suitable For The Following Floor Applications:

- Under Screed
- Over Timber Floors
- Over Concrete Floors
- Under UFH

Width: 1.5m

Length: 8m

Coverage: 12m²



EN 13984:2013

ID Notified Bodies: KIWA

Flexible sheets for waterproofing - Plastic and rubber vapour control layers.

SFUF-BD-CPR-01-04-20

[www.superfoil.co.uk/products/multifoil-insulation/sfuf/](http://www.superfoil.co.uk/products/multifoil-insulation/sfuf/)

Reaction to Fire - NPD

Elongation (Length) - 26/16%

Elongation (Width) - 28/17%

Water penetration - W1

Tensile Properties (Length) - 705N/635N/50mm

Tensile Properties (Width) - 610N/580N/50mm

Resistance to Tearing (Length) - 428N

Resistance to Tearing (Width) - 453N

Flexibility at low temp (Pliability) - -40°C

DOP



# Key Features:

SuperFOIL SFUF is designed for floors while also suitable for roofs and walls

SFUF is from SuperFOIL’s underfloor insulation range, offering insulation, vapour control, and a radiant barrier - all within a single product.

SFUF, like all our multifoil products is designed to deliver. It’s great for use in standalone and hybrid applications, helping your project achieve it’s full potential.

Built-in protective layer means the top can be screeded without worrying about damage to the insulation.

SuperFOIL SFUF can be installed in combination with other insulation types.

SuperFOIL’s clever design allows easier fitting without any specialist tools and minimal wastage, unlike many traditional insulation types.

Ideal for use in new builds, retrofits, and extensions.

## Sustainability Pledge

SuperFOIL is a carbon-neutral business dedicated to making a positive impact, both on the environment and in people’s lives, by prioritising sustainability at every level of our business: from production to installation.



SuperFOIL®


CHANGE THE WAY YOU INSULATE

# Performance

Core	0.8 R Value
Emittance	0.9

# Product Dimensions

Thickness	6mm
Length	8m
Width	1.5m
Weight	6kg

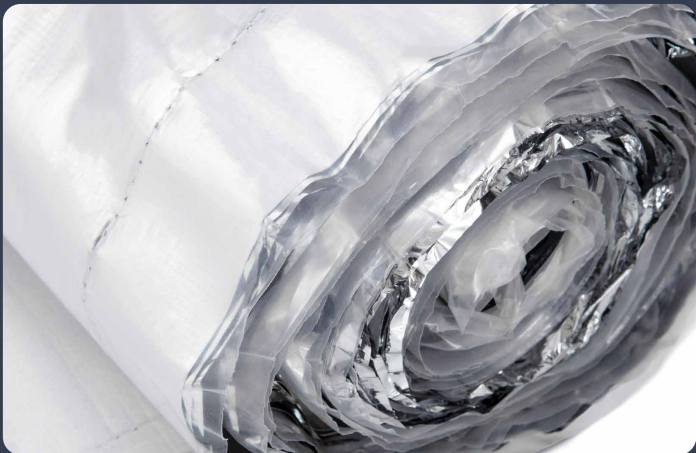

# Recommended Products

## For Screeding:



**DPM Polythene Jointing Tape**  
100mm



**SuperFOIL® XL Scissors**  
12 Inch

## For General Use:



**SuperFOIL® Multifoil Tape**  
100mm x 20m



**SuperFOIL® XL Scissors**  
12 Inch



**SuperFOIL® 3-in-1 Staple Gun**  
1000x10mm

With over two decades of industry experience, our experts are always ready to help you get the most out of our products. If you have any questions, please get in touch with our sales team on **01636 639900** Monday to Friday 9am-5pm.