

■ Description

UFH Insulation Board are manufactured to suit the pipe diameter and spacing required to achieve the desired thermal output. The board's high compressive strength enables it to withstand the rigours of the installation process as well as the long term loads imposed in residential and commercial applications. The ZL-XPS300-16 is specifically designed to accommodate 16mm pipes, and the dimensions of the board are 1200mm * 600mm * 25mm.




Product Code	Description
ZL-XPS300-16	300Kpa Board for 16mm Pipe

■ Technical data

Performance	ZL-XPS300-16
Extruded Polystyrene-XPS2	High Strength UFH Board
Strength at 10% compression	300 kpa
Thermal conductivity	0.035
Temperature range	-20 / +70 °C
Route sizes available (to suit pipe diameter)	16mm
Pipe centres	150 mm
Board Size	600 x 1200 x 25 (mm)
Applications	New Build or renovation, single or multiple rooms
Fire-retardant class	Europe B Class

■ Dimension

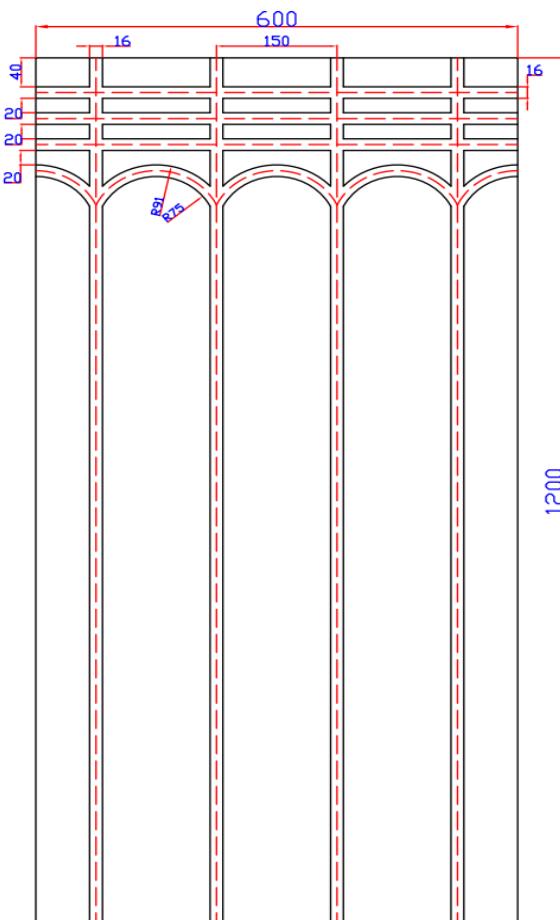

■ Benefits

1. High resistance to compression - 300 kPa
2. Manufactured to suit pipe and spacing required
3. Works in conjunction with acoustic treatments
4. Promotes outstanding thermal output