

## ZL-3001-25 / 6-130



### [ SUITABLE FLUIDS ]

Heating water to VD12035  
 Heating water  
 Water/glycol mixtures max. mixing ratio 1:1

### [ PERFORMANCE ]

Fluid temperature range -10°C~+180°C  
 Max. working pressure 10bar

### [ AMBIENT TEMPERATURE ]

Permissible up to 50°C

### [ POWER ]

Mains power 1~230v,50Hz

### [ MOTOR ]

Degree of protection IP44  
 Insulation class H

### [ CONSTRUCTION MATERIALS ]


Pump body cast iron  
 Impeller PEI  
 Shaft Ceramic  
 Bearings Ceramic

### [ MOUNTING POSITIONS ]


Pump shaft in the horizontal plane

### [ PUMP EQUIPMENT ]


Screwed end single head pump  
 Manual 3-speed control  
 Non-overloading single phase motor

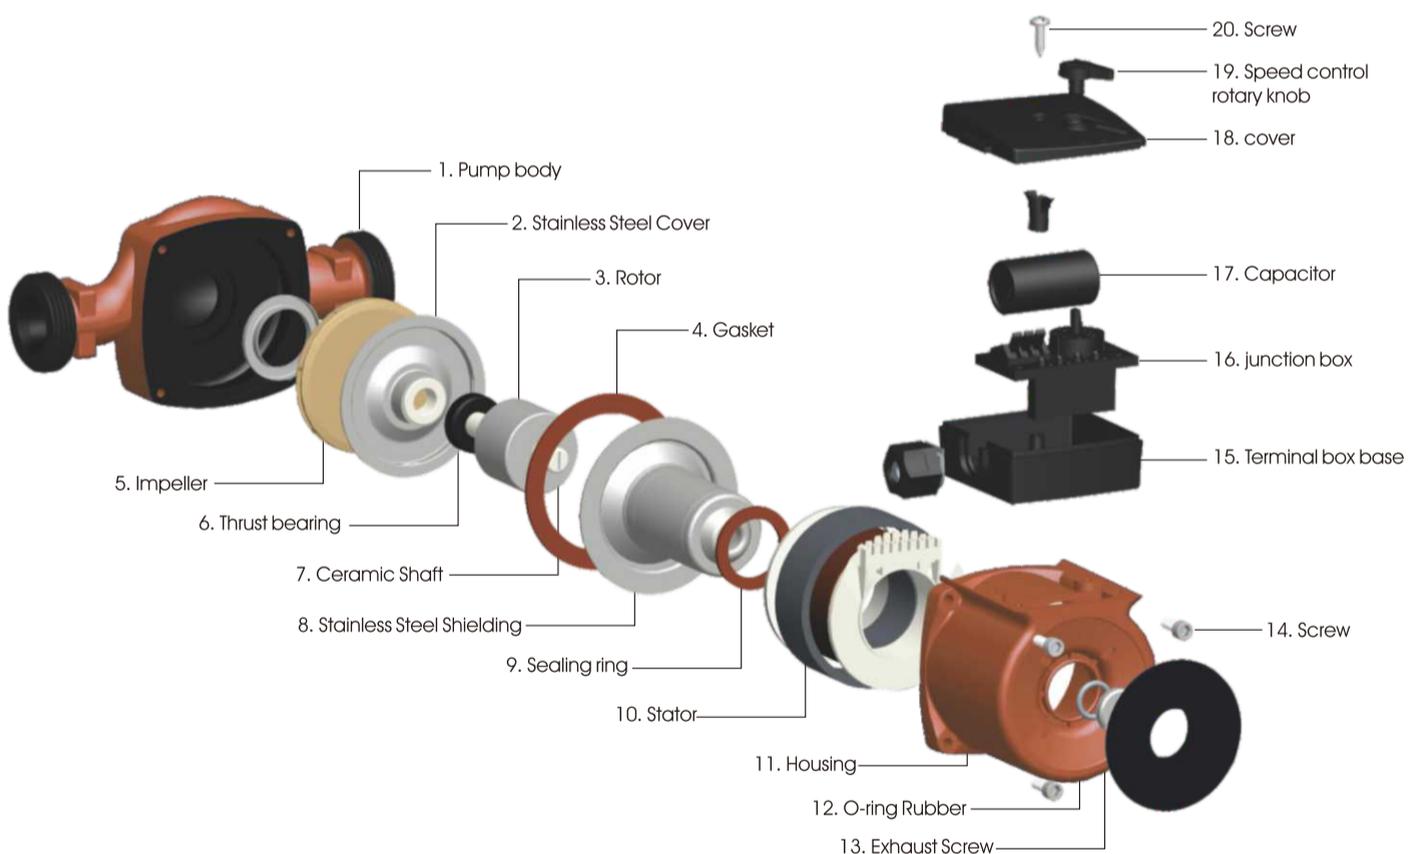

### OVERALL DIMENSION

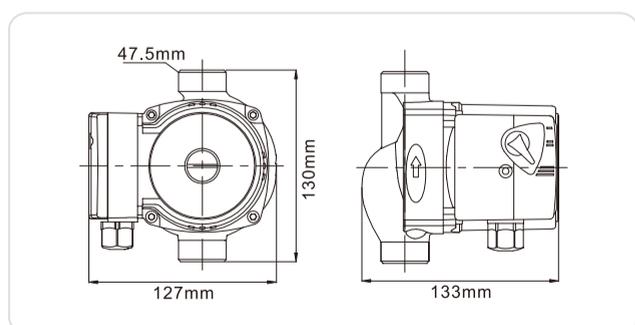

### PERFORMANCE CURVE

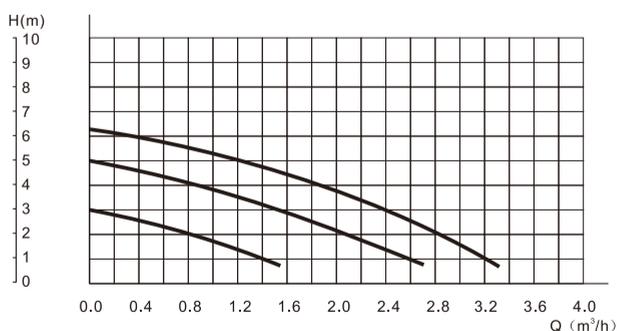

### TECHNICAL PARAMETER

| Model              | Rated Power (W) | V/Hz    | Highest Head (m) | Max.Capacity (L/min) | Input&Outlet Dia. (mm) | N.W (kg) | G.W (kg) | Q'ty (PCS) | Package Dimension (cm) | 20'  |
|--------------------|-----------------|---------|------------------|----------------------|------------------------|----------|----------|------------|------------------------|------|
| ZL-3001-25 / 6-130 | 93/67/48        | 220V/50 | 6/5/3            | 50/40/25             | 1 1/2"                 | 2.4      | 21       | 8          | 34.5*30*29.5           | 6800 |